




NEBULA Gen 2 *GLOW* LED Touchscreen

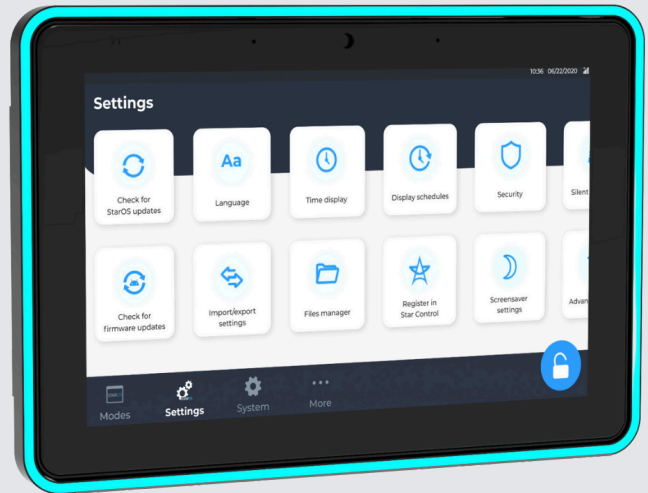

Capacitive Touch



Optional POE



With LED Lights

Overview

Nebula Glow Generation 2 Series features quad-core processors and is available in three models: 10-inch (ALU100), 15.6-inch (NES150), and 21.5-inch (NES210), all offered as commercial and industrial-grade touch panel PCs and all-in-one devices. Combining high performance with energy efficiency, these devices come pre-installed with STAROS kiosk software, supporting secure single-application mode and multi-application parallel operation. They integrate STAR CONTROL remote device management (MDM) and Musea digital signage interactive editing system, while providing Startool open APIs for third-party integration. The devices also feature a programmable LED-lit bezel, customizable to meet your functional needs, blending utility with aesthetic appeal. Optional peripherals include 1D/2D barcode scanners and RFID readers.

Choice of Wi-Fi / Ethernet or POE available with 10" and 15.6inch

Modern design with flexible mounting in portrait, landscape and table-top orientation

Optimize deployments with cloud-based configuration, monitoring and scheduling

Modern design with flexible mounting in portrait, landscape and table-top orientation

	Name	Nebula Glow Gen 2		
	Model	ALU100 Part#568/GLOW	NES150 Part#568/GLOW	NES210 Part#568/GLOW
Screen Size	Size	10"	15.6"	21.5"
Panel Info	Resolution	1280x 800	1920 x 1080	1920 x 1080
	Panel Brightness	500cd/m²	450cd/m²	450cd/m²
	Brightness	425cd/m² with touch Screen	400cd/m² with touch Screen	400cd/m² with touch Screen
	Contrast	800:1	1000:1	1300:1
	Aspect Ratio	16:10	16:9	16:9
	Active Display Area	216.96 x 135.6mm	344.16 × 193.59 mm	476.064 x 267.786mm
	Viewing Angle	85°/85°/85°/85°	89°/89°/89°/89°	89°/89°/89°/89°
	Response time	15ms	20ms	14ms
Touch Data	Touch Tech	G+G 10 point cap touch	G+G 10 point cap touch Anti-glare glass	G+G 10 point cap touch Anti-glare glass
	Hardness Of Surface	≥ 6H	≥ 7H	> 6H
	Touch method	Finger touch 、Capacitive stylus		
	Transparency	≥85%	≥85%	≥86%
	Touch Glass Thickness	2mm (Not including Sensor thickness)	2mm (Not including Sensor thickness)	2mm (Not including Sensor thickness)
Hardware & OS	Bonded Panel	Optical bonded capacitive touch Panel		
	CPU	Quad Core ARM Cortex A55@2.0GHz		
	RAM	4GB DDR4		
	ROM	32GB eMMC Flash		
	OS	Android 12		
Software	STAROS	License Free Kiosk Mode App and Multi App Mode, Auto Lockdown, Browser and Media Mode		
	STARCONTROL	Remote Mobile Device Management		
	STARTOOL	Tool for developers to control device and Open API and controlling lights		
	Musea	· Digital Signage Software · Remote Creating and Managing Interactive Signage Content Remotely		
	GMS	Support Android 11 GMS		
Video/ Image	Video Format	H.265, VP8, RV, WMV, AVS, H.263, Mpeg4, Up to 4K decoding, HTML5, Flash 10		
	Audio Format	MP3, WMA, AAC, etc.		
	Image Format	JPEG, BMP, PNG		
Audio	Speaker	2W x 2	2x5W	2x5W
Communciation	Bluetooth	BT 5.0	BT 5.0	BT 5.0
	Camera	2MP	2MP	2MP
	Noise Cancellation	X2 with Noise Canceling	X2 with Noise Canceling	X2 with Noise Canceling
	Sensor	Ambient & Proximity sensor	N/A	N/A
WIFI	WIFI	802.11 a/b/g/n/ac 2.4GHz & 5GHz (Three antenna)		
	Ethernet	100/1000 LAN POE	100/1000 LAN POE	100/1000 LAN POE
General	Color	Grey+Black	Black or White	
	Plastic materials	Plastic ABS "Flame retardant, TBBA" (LED light frame Non-flame retardant material)	Plastic ABS	Plastic ABS
	I/O	RJ45x1, TFslotx1, TYPECx1,USB2.0x1, USB3.0x1, 3.5mm audio x1, DCx1; 1×UART; 2×GPIO; ,1×Wiegand; 1×VCC-5V		
	Peripheral Connectors	TYPE C x 1 (only for GS module)	TYPE C x 2 (only for GS module)	TYPE C x 2 (only for GS module)
	4G	NO	Optional	Optional
	POE	Yes (IEEE802.3af)	Yes (IEEE802.3at)	Optional IEEE802.3bt(PSE 90W)
		(Choose either Power In or POE but not both at the same time)		
	Included in Box	Nebula Tablet, Power Adaptor, Power cable		
	Operating Environment	Working Temperature: 0-45 degree celsius		
	Language	Multi language		
Power Management	Power supply unit	External		
	Power supply	DC 12V 2A	DC 12V 5A	DC 12V 5A
	Power usage	14.5W typical, 5.8W stand by, 4.3W off mode	TBD	TBD
Sustainability	Regulations	FCC, CE, UKCA , RoHS support		
	REACH SVHC	REACH does not contain SVHC above 0.1%: Lead		
Lights	Light Control	RGB LED		
Mounting	VESA	VESA 75	100 x 100	100 x 100
Dimensions	Dimensions (LxWXH)	267.05×185.69×28.85mm	375.98 x 32 x 227.98mm	515.97 x 36 x 311.97mm
	Weight	1.1 K g	2.1 kg (For reference)	4.9kg (For reference)
	Box size / each pc (LxWXH)	385 x 222 x 65 mm	443 x 115 x 303mm (For reference)	583 x 115 x 382mm (For reference)
	Master Box size (LxWXH)	470 x 400 x 355 mm	464 x 365 x 327mm (For reference)	604 x 365 x 406mm (For reference)
	Master Box Weight	15.2Kg	8.5kg (For reference)	17.5kg (For reference)
	Pieces/ Carton	10 PCS	3pcs	3pcs

Peripheral Options

1D Barcode Newland	BC100-NEW
2D Barcode Zebra	BC200-ZEB
Elatec RFID Reader	

Mounting Options

Shelf Mount	FIX-014 (Foldable Mount with Magnet at one side) (For 10" models)
Desk Mount	FIX-027 (Foldable base bracket) (For 15.6" and 21.5" models)
	FIX-028 (Adjustable Desk Mount) (For 10" and 15.6" models)
	FIX-030 (For 15.6" and 21.5" models)
Wall Mount	WM015012S

CONTACT US

United States

101 Hudson St., 21st Floor
Jersey City, NJ 07302 USA
626 228 5927

Hong Kong

Flat D, 5/F, Excelsior Building,
364 Nathan Road,
Kowloon, Hong Kong
852 23762803

ShenZhen

Bldg. 9, 4/F Zhong Yuntai Technology Industrial
Park, Tangtou No.1 Road, Shiyan Street, Baoan,
ShenZhen, PRC
86 755 2600 1808

To find out more about our extensive range of Glory Star solutions, go to www.glorystargroup.com, or call the office nearest you. For more information, please contact us at sales@glorystargroup.com. Glory Star reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Glory Star, the Glory Star logo, STAR CONTROL and STAROS are either trademarks or registered trademarks of Glory Star Group Limited. All other trademarks are the property of their respective owners.